

**ILLUMINATION  
GOLIGHT**



**Features**

- 10 high flux LED's or 65W H9 Halogen bulb
- 370° horizontal rotation & 135° vertical tilt
- Narrow 8° beam can be seen at well over 3,000+ feet (1km+)
- Rugged UV resistant plastic shell
- Wireless or hard wired (dash mount) remote control options
- Available in black or white housing



**ILLUMINATION  
Tractor/Spreader/Utility**


**Features**

- Pedestal mount
- Latest generation LEDs - no bulbs to replace
- High efficiency electronics
- Dim and full brightness modes
- Dual-optic design (3 spot optics and 9 flood optics)
- Environment proof rubber housing and polycarbonate lens
- Red version may be used as a stop/tail/turn light
- PAR 36 bulb styling
- **1 Year Warranty**



**Switch 766152**  
(sold separately)

**Dimensions**

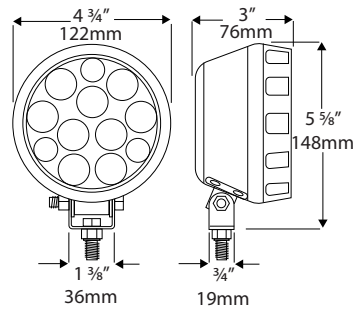

Part #	Housing Color	Vdc	Amps	Mounting	Technology	Feature	Light Output
<b>Radio Ray Series</b>							
✓ 2000	White	12	5.5	PM	Halogen	Wireless Remote	225Kcd
2051	Black	12	5.5	PM	Halogen	Wireless Remote	225Kcd
✓ 2020	White	12	5.5	PM	Halogen	Dash Mount Remote	225Kcd
✓ 2021	Black	12	5.5	PM	Halogen	Dash Mount Remote	225Kcd
20004-GO	White	12	2.8	PM	LED	Wireless Remote	320Kcd
20514	Black	12	2.8	PM	LED	Wireless Remote	320Kcd
20074-GO	White	12	2.8	PM	LED	Wireless Dash Mount & Wireless Remote	320Kcd
20574	Black	12	2.8	PM	LED	Wireless Dash Mount & Wireless Remote	320Kcd
<b>Stryker Series</b>							
✓ 3000	White	12	5.5	PM	Halogen	Wireless Remote	200Kcd
3051	Black	12	5.5	PM	Halogen	Wireless Remote	200Kcd
✓ 3067	White	12	5.5	PM	Halogen	Dash Mount & Wireless Remote	200Kcd
3049	Black	12	5.5	PM	Halogen	Dash Mount & Wireless Remote	200Kcd

✓ = Top Seller | PM = Permanent Mount

<b>Available Models</b>						
Part #	Color	Vdc	Amps	Lumens (Full/Dim)	Lifetime	
✓ 93600	Amber	12	0.45	360 / 96	50,000 hours	
93601	Blue	12	0.45	360 / 96	50,000 hours	
✓ 93602	Clear	12	0.45	360 / 96	50,000 hours	
93605	Red	12	0.45	360 / 96	50,000 hours	


✓ = Top Seller

**ILLUMINATION**  
**Work Light**

**Features**

- Die-cast zinc housing
- Impact resistant polycarbonate front shield
- IP68 rating
- Tested to US MIL810-STD standard
- Waterproof Deutsch connector
- Comes with wiring harness and switch
- Comes with mounting bracket and stainless steel hardware
- Available in spot, flood and driving beam patterns
- Corrosion resistant stainless steel screws
- Waterproof & Anti-Fog Military Breather
- **2 Year Warranty**

**Over 100° Angle of rotation**

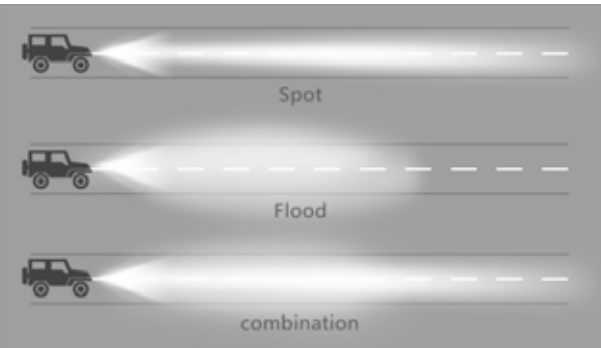

Available Models						
Part #	Vdc	Amps	# LEDs	Beam Pattern	Lumens	
93210	12-24	0.8	4	Spot	1430	
93310	12-24	0.8	4	Flood	1430	
✓ 93400	12-24	1.2	6	Driving	2800	

✓ = Top Seller




93210 & 93310



93400

**Dimensions**

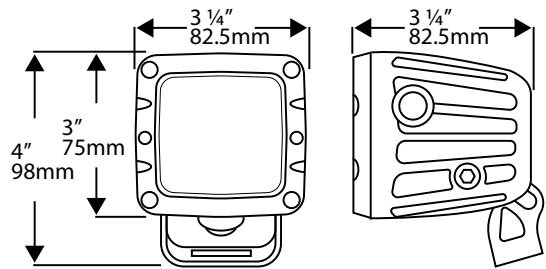

**ILLUMINATION**  
**Linear Work Light**



Length 4"  
93220 & 93320




Length 10"  
93240, 93340  
& 93540

**Features**

- 12Vdc - 24Vdc models available
- Extruded aluminum housing, impact resistant polycarbonate front shield
- IP68 rating
- Tested to US MIL810-STD standard
- Waterproof Deutsch connector
- Wiring harness with switch and relay
- Comes with mounting bracket and stainless steel hardware
- Available in spot, flood and combo beam patterns
- Corrosion resistant stainless steel screw
- **2 Year Warranty**

**Dimensions**

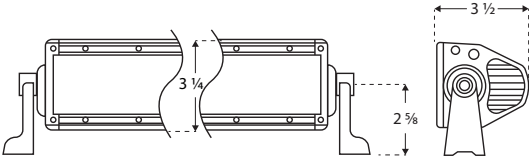

Available Models						
Part #	Vdc	Amps	# LEDs	Beam Pattern	Lumens	Length
93220	12-24	1.2	8	Spot	1736	4"
93320	12-24	12.	8	Flood	1736	4"
93230	12-24	1.8	12	Spot	2604	6"
93330	12-24	1.8	12	Flood	2604	6"
✓ 93530	12-24	1.8	12	Combo	2604	6"
✓ 93540	12-24	3.0	20	Combo	4340	10"

✓ = Top Seller

**NEW!**


# ILLUMINATION

## LED White Panel

### Features

- LED flat panel light, ideal for mobile interior lighting applications
- Also useful in recreational applications, mobile homes, tent trailers etc.
- High lumen with low current draw for extended use
- Constructed with extremely durable materials for long use
- Indoor use only / not waterproof
- Easy to mount, install and wire into vehicles
- Temperature range: -20°C to 80°C
- **1 Year Warranty**

### Dimensions

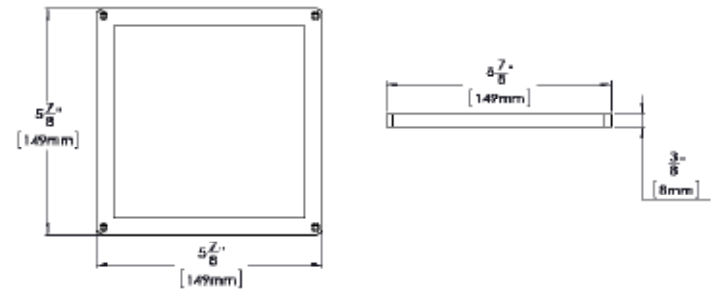

Part #	Vdc	Lumens	Power Consumption	Mounting	Dimension
93780	10-16	550	7W	Surface	6" x 6" x .25"

# ILLUMINATION

## Linear White Light



Articulating bracket (sold separately)

**93792**  
pictured with 98092 brackets (sold separately)



detachable clip (included) permanent mounting (included)

### Features

- Low profile design, minimizes obstruction allowing for multiple applications
- The polycarbonate outer case has an IP66 rating, preventing moisture and dust ingress
- The light comes with 2 surface mounting options; detachable clips, and permanent
- The articulating aluminum bracket (sold separately), allows for quick adjustment and positioning of the light
- Quick and easy to install.
- **10 Year Warranty**

Part #	Vdc	Amps	Lumens	Watts	Length	Height
93791	10-14	0.24	320	3	12"	0.43"
93792	10-14	0.44	640	6	20.5"	0.43"
93793	10-14	1.0	1280	12	40.5"	0.43"
98091	Mounting kit for 93791, articulating aluminum bracket with wing nut for angle adjustment					
98092	Mounting kit for 93792, articulating aluminum bracket with wing nut for angle adjustment					
98093	Mounting kit for 93793, articulating aluminum bracket with wing nut for angle adjustment					